PLUSETECH DDR4 16GB 2666 SO-DIMM Datasheet

PSD4B16HA26SN-16G

Module Part Number	PSD4B16HA26SN-16G
Memory Type	DDR4
Module Type	Unbuffered SO-DIMM
Module Density	16GB
Data Width	x64
Data Rate	2666 MT/s
V_{DD} Voltage	1.2V
Interface	260-pin
Number of Ranks	2
SDRAM Device Width	X8
CAS Latency	CL19
Operation Temperature	0°C ~ +85°C
RoHS	Yes
Standard	JEDEC

Plusetech Technology (SHENZHEN) CO., LIMITED

NOTE:INFORMATION IN THIS PRODUCTSPECIFICATION IS SUBJECT TO CHANGE AT ANYTIME WITHOUT NOTICE, ALL PRODUCT SPECIFICATIONS ARE PROVIDED FOR REFERENCE ONLY.TO ANY INTELLECTUAL,PROPERTY RIGHTS IN PLUSETECH CO.，LTD.ALL INFORMATION IN THIS DOCUMENT IS PROVIDED.

Table of content

Features 3
Table 1: Key Timing Parameters 4
Table 2: Addressing 4
Table 3: DDR4-2666 Speed Bins 4
Table 4: Operating Conditions 5
Table 5: DRAM Component Operating Temperature Range 5
Table 6 : Absolute Maximum DC Ratings 6
PCB Feature overview 7
Module Dimensions 8
Figure 1: 260-pin DDR4 SO-DIMM 9
Part Number Decode 10
Revision History 10

PLUSETECH Technology (SHENZHEN) CO., LIMITED

©2025PusetechTechnology(Shenzhen)Co.,Ltd.
www.Plusetech.com
Allrightsreserved.

Features

• JEDEC Standard

• 260-pin/ small outline dual in-line memory module(SO-DIMM)

• Fast data transfer rates: PC4-2666/ backward compatible PC4-2400/ PC4-2133

• 16GB (1024M x 8 x 16PCS)

• V_{DD} = 1.2V (1.14-1.26V)

• Backward compatible to V_{DD} = 1.2V ± 0.06V

• V_{DDSPD} = 2.5V

• Nominal and dynamic on-die termination(ODT) for data/ strobe/ and mask signals

• Dual-rank

• 16 internal banks

• Bi-Directional Differential Data Strobe

• Programmable CAS latency 15/ 16/ 17/ 18/ 19 supported

• On board I^2C with integrated serial presence-datect(SPD) EEPROM

• JEDEC standard 78ball FBGA(x8)

• Gold edge contacts

• This product in compliance with the RoHS directive

• Terminated control/ command/ and address bus

Options

• Operation temperature

- Commercial 0°C ~ +85°C

• Package

- 260-pin DIMM

• Frequency/CAS latency

- 0.75ns @ CL = 19(DDR4-2666)

PLUSETECH Technology (SHENZHEN) CO.,LIMITED

©2025PusetechTechnology(Shenzhen)Co.,Ltd.
www.Plusetech.com
Allrightsreserved.

Table 1: Key Timing Parameters

Part Number	Industrial Nomenclature	Data Rate(MT/s)				
		CL19	CL18	CL17	CL16	CL15
PSD4B16HA26SN-16G	PC4-2666	2666	2400	2400	2133	2133
	PC4-2400		2400	2400	2133	2133
	PC4-2133				2133	2133

Table 2: Addressing

Parameter	16GB
Device Configuration	1024Mb x 8bit x 16 pcs
ROW address	32K (A[14:0])
Column address	1K (A[9:0])
Device bank group address	4 (BG[1:0])
Device bank address per group	4 (BA[1:0])

Table 3: DDR4-2666 Speed Bins

Speed Bin			DDR4-2666		Unit	Note
CL - tRCD - nRP			19-19-19			
Parameter		Symbol	min	max		
Internal read command to first data		t_{AA}	14.25	19	ns	
ACT to internal read or write delay time		t_{RCD}	14.25	-	ns	
PRE command period		t_{RP}	14.25	-	ns	
ACT to ACT or REF command period		t_{RC}	46.25	-	ns	
ACT to PRE command period		t_{RAS}	32	9 * t_{REFI}	ns	

PlusetechTechnology (SHENZHEN) CO., LIMITED

©2025PusetechTechnology(Shenzhen)Co.,Ltd.
www.Plusetech.com
Allrightsreserved.

Table 4: Operating Conditions

Recommended DC Operating Conditions – DDR4 (1.2V) operation

Symbol	Parameter	Rating			Units	Notes
		Min.	Typ.	Max.		
V_{DD}	Supply Voltage	1.14	1.2	1.26	V	1/2/3
$V_{DD}Q$	Supply Voltage for Output	1.14	1.2	1.26	V	1/2/3

Notes:

1. Under all conditions/ $V_{DD}Q$ must be less than or equal to V_{DD}.
2. $V_{DD}Q$ tracks with V_{DD}. AC parameters are measured with V_{DD} and $V_{DD}Q$ tied together
3. Under these supply voltages/ the device operates to this DDR4 specification.

Table 5: DRAM Component Operating Temperature Range

Symbol	Parameter	Rating	Units	Notes
T_{OPER}	Normal Operating Temperature Range	0 to 85	℃	1/2

Notes:

1. Operating Temperature TOPER is the case surface temperature on the center / top side of the DRAM. For measurement conditions/ please refer to the JEDEC document JESD51-2.
2. The Normal Temperature Range specifies the temperatures where all DRAM specifications will be supported. During operation/ the DRAM case temperature must be maintained between 0-85℃ under all operating conditions.

PLUSETECH TECHNOLOGY (SHENZHEN) CO., LIMITED
Plusetech Technology

Table 6：Absolute Maximum DC Ratings

Symbol	Parameter	Rating	Units	Notes
V_{DD}	Voltage on V_{DD} pin relative to V_{SS}	-0.4V~1.5V	V	1/3
$V_{DD}Q$	Voltage on $V_{DD}Q$ pin relative to V_{SS}	-0.4V~1.5V	V	1/3
V_{IN}/ V_{OUT}	Voltage on any pin relative to V_{SS}	-0.4V~1.4V	V	1
T_{STG}	Storage Temperature	-55 to +100	℃	1/2

Notes:

1. Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

2. Storage Temperature is the case surface temperature on the center/top side of the DRAM. For the measurement conditions/ please refer to JESD51-2 standard.

3. V_{DD} and $V_{DD}Q$ must be within 300mV of each other at all times; and V_{REF} must not be greater than 0.6*$V_{DD}Q$/ When V_{DD} and $V_{DD}Q$ are less than 500mV; V_{REF} may be equal to or less than 300mV.

PLUSETECH Technology (SHENZHEN) CO., LIMITED

©2025PusetechTechnology(Shenzhen)Co.,Ltd.
www.Plusetech.com
Allrightsreserved.

PCB Feature overview

- **General**

  * Board size: 69.6 x 30 mm ±0.15 mm

  * Finished Board Thickness: 1.2 ±0.1 mm

* Panel: 6 pieces PCB per panel

*** 8-layer board**

  * Impedance: 50/55 Ohm ±10% (Single-ended)
    83/93 Ohm ±15% (Differential)

*** Pin count: 260 PIN**

- **PCB Material**

* Glass Epoxy FR4, .UL 94V-0, BP ML

- **Plating**

* Edge Connector Plating: Nickel Followed by gold


  - Nickel Plating Thickness: 100 u" min.
  - Surface treatment:
    Gold Plating: 3u" min.
    SMT PAD: average 2~3u"

PLUSETECH Technology (SHENZHEN) CO., LIMITED

© 2020 Wodposit Technology Co.,Ltd. All rights reserved.


Module Dimensions

Figure 1: 260-pin DDR4 SO-DIMM

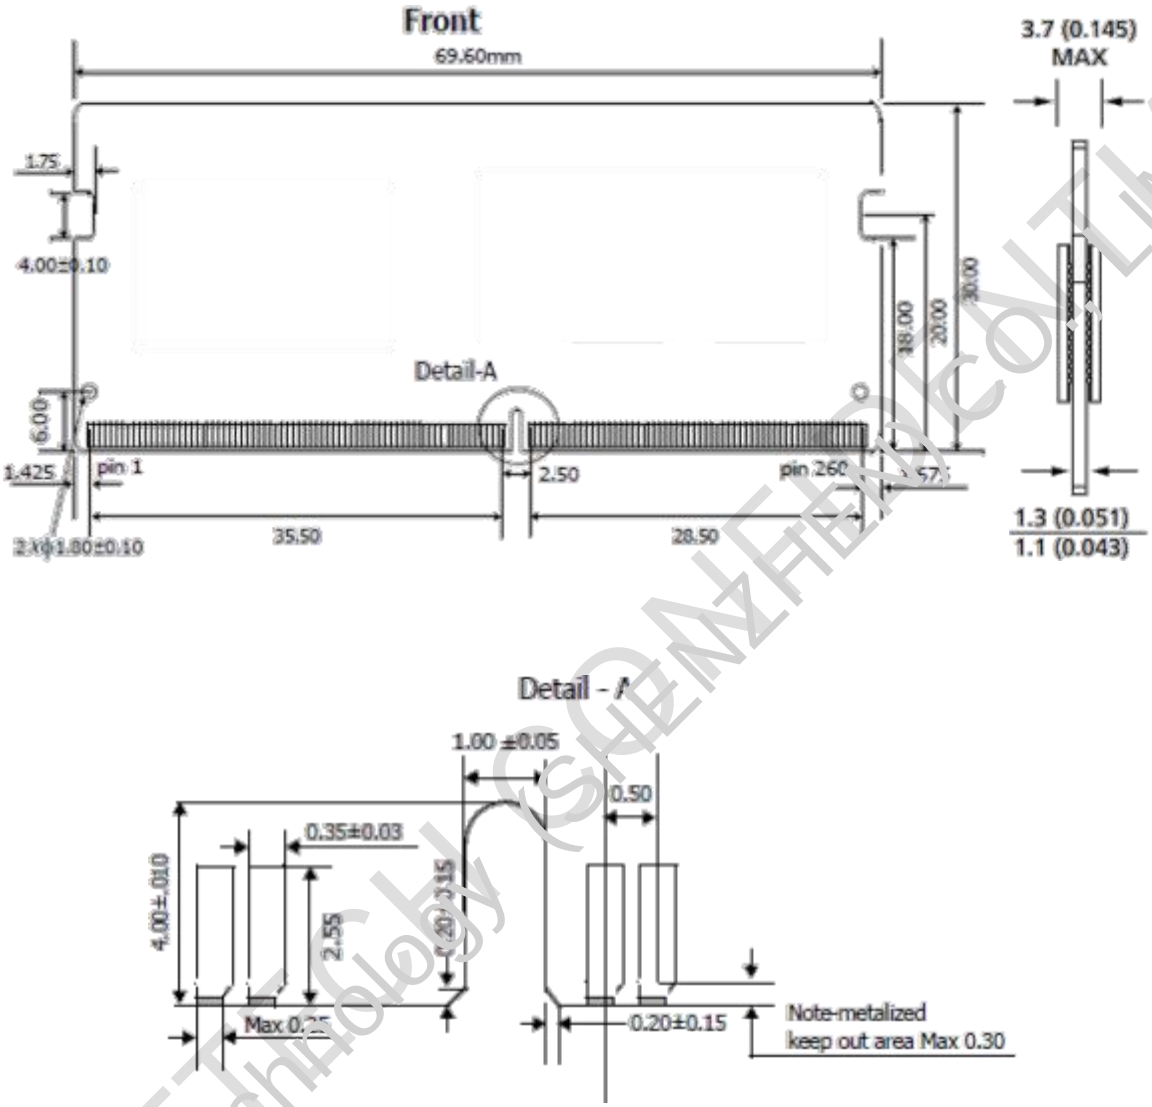


PLUSETECH Technology (SHENZHEN) CO.,LIMITED

TOP SIDE 2-RANK WITHOUT ECC

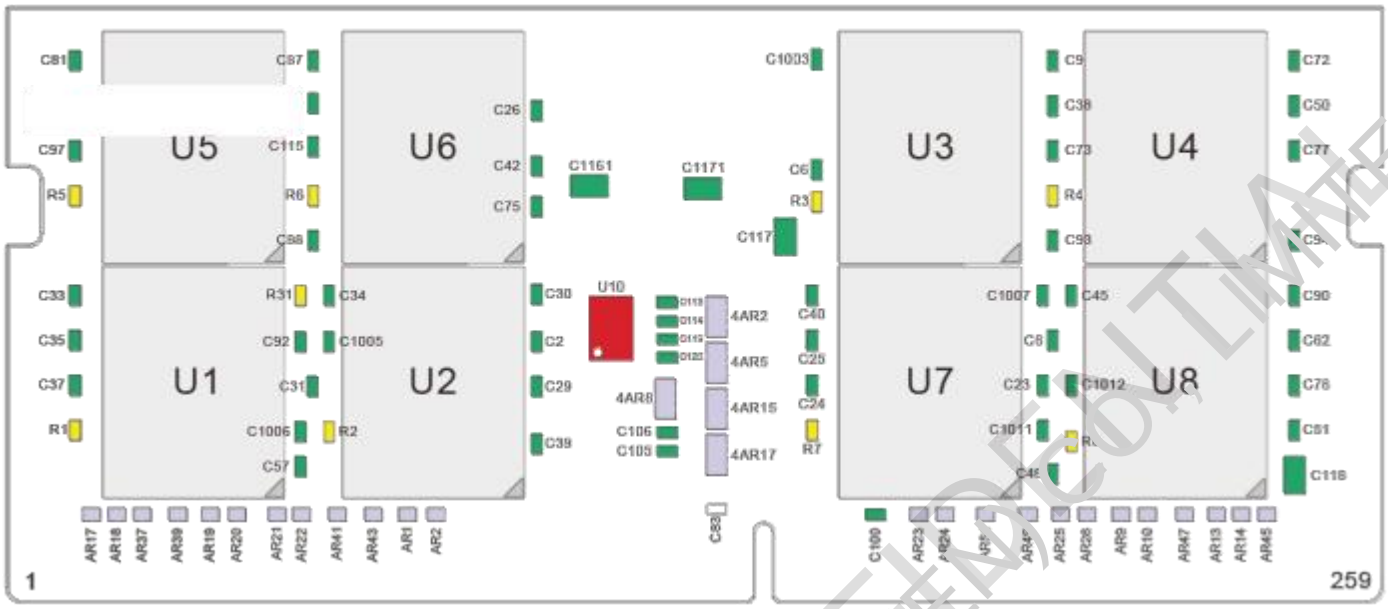

BOTTOM SIDE 2-RANK WITHOUT ECC

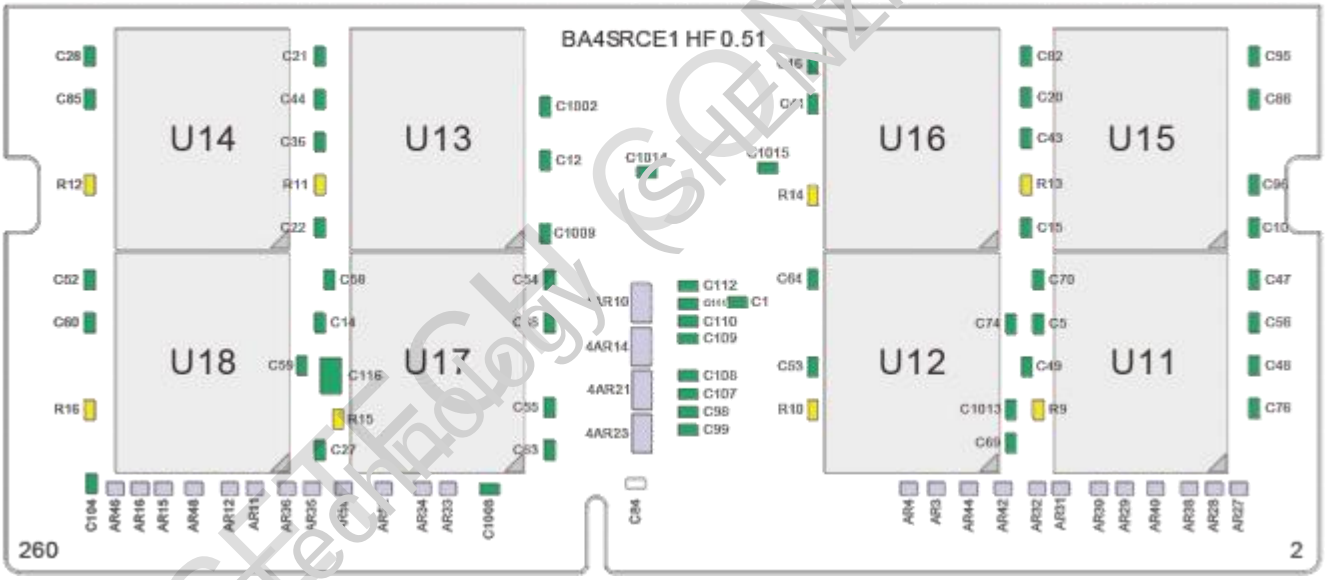


Notes:

1. All dimensions are in millimeters (mm)/ MAX/MIN or typical(TYP) where noted.
2. All dimensions diagrams is for reference only.

PlusetechTechnology(SHENZHEN)CO.,LTD

©2025PusetechTechnology(Shenzhen)Co.,Ltd.
www.Plusetech.com
Allrightsreserved.

Part Number Decode

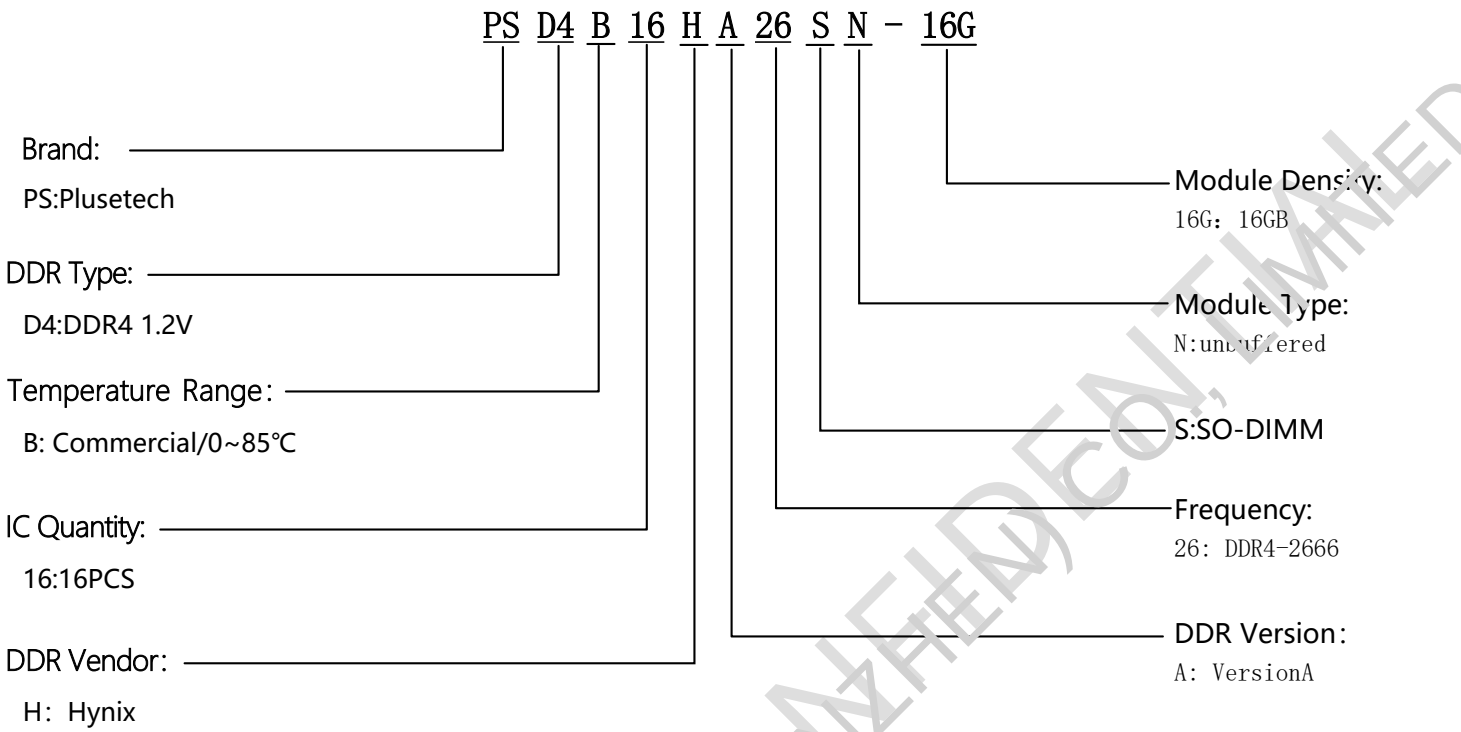

RevisionHistory

Rev.A0 - 12 / 22

• Initial release.

PLUSETECH Technology (SHENZHEN) CO., LIMITED

©2025PusetechTechnology(Shenzhen)Co.,Ltd.
www.Plusetech.com
Allrightsreserved.